


AUREX ECCO

HIGH-PRECISION ULTRASONIC MEASUREMENT


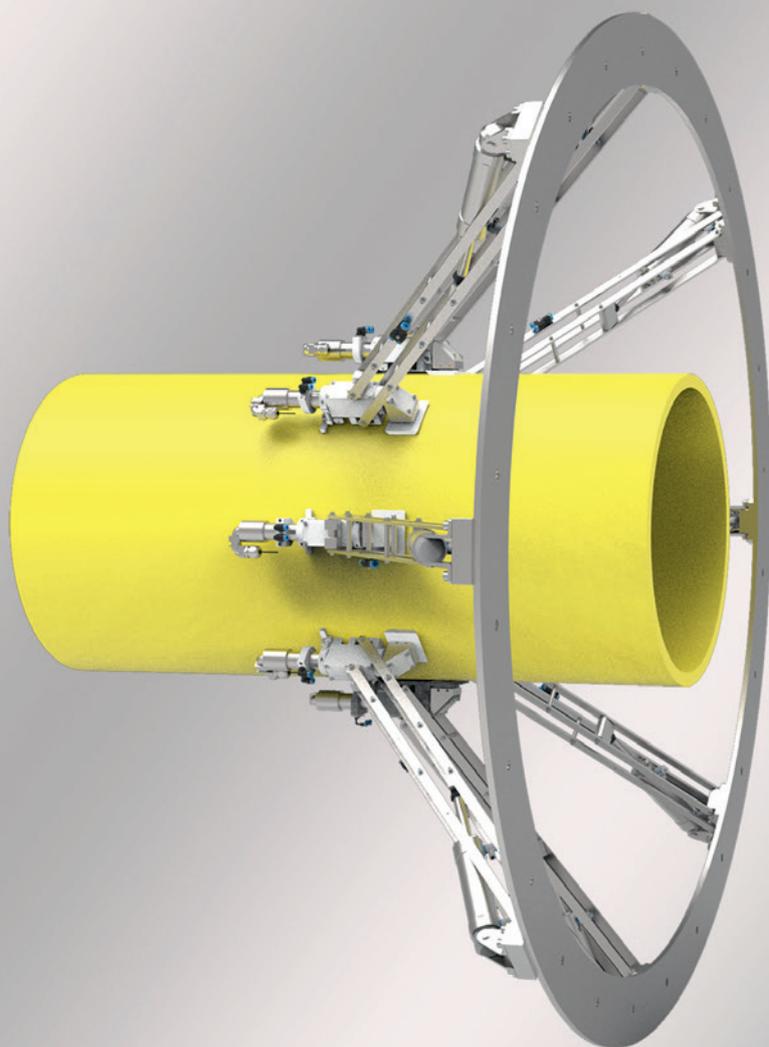


AUREX ECCO

HIGH-PRECISION ULTRASONIC MEASUREMENT

GENERAL FEATURES

- Detailed product information (wall thickness, diameter)
- Continuous check on adherence to product specifications
- Process automation through control of wall thickness, thin points, diameters, weight per metre and mass throughput*
- Material savings of up to 5 %
- Significant reduction of start-up scrap
- Accelerated production start of the extrusion line
- Quick centering of the pipe wall
- Fast compliance with product specification after production start
- Fast identification of product variations
- Regular wall thickness distribution
- Suitable for PE, PVC and PP for exterior diameters larger than 200 mm
 - PE pipe wall thickness from 8 - 140 mm
 - PVC + PP pipe wall thickness from 8 - 40 mm

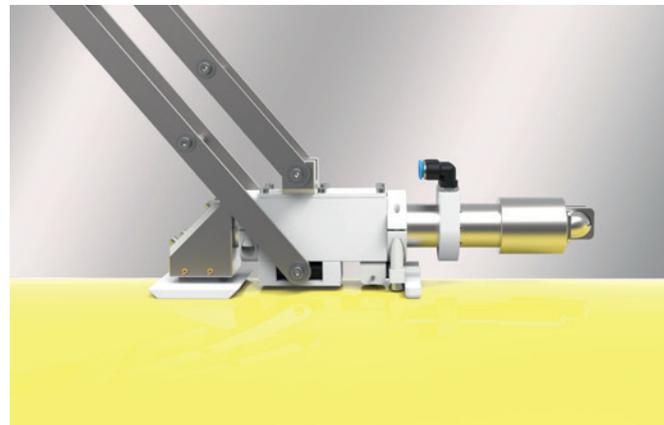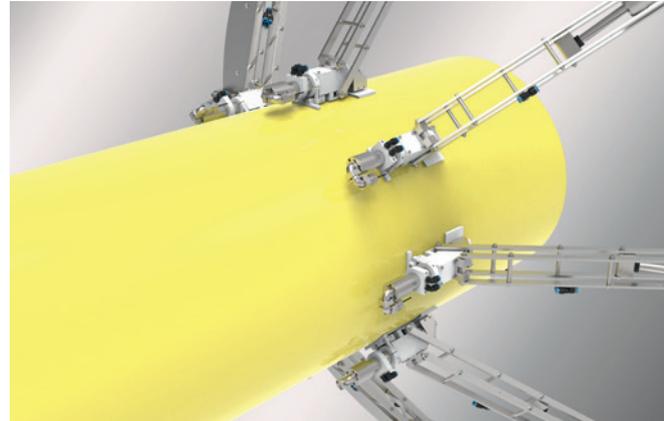


MADE IN GERMANY

Type	No. of sensors	Pipe dimensions [mm/inch]
ECCO 630	4/8	200 – 630 7.87-24.80"
ECCO 800	4/8	200 – 800 7.87-31.49"
ECCO 1200	4/8	200 – 1000 7.87-39.37"
ECCO 1600	4/8	609 – 1670 24.00-65.75"
ECCO 2000	4/8	1000 – 2000 39.37-78.74"
ECCO 2500	4/8	1500 – 2500 59.05-98.42"
ECCO 3000	4/8	2000 – 3000 78.74-118.11"

* in combination with iNOEX gravimetric systems